


## MP4S - 08120

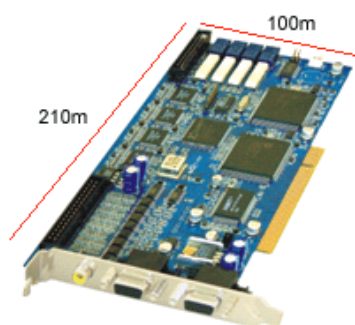

### Feature

- Graphic User Interface to facilitate operation
- PTZ control / Emergency Recording
- Support Smart Search
- Support POS system and ATM system
- Multiplex function: display, monitor, playback, remote, file backup, and recording simultaneously
- Pre-recording and after-recording when the sensor and motion triggered
- Adjustable recording speed and compression ratio (optional resolution from 10 to 90 grades)
- Advanced Mpeg4 format file backup and support Calendar Searching function
- Notify by email
- Remote monitoring through TCP/IP
- Remote control side up to 36 DVRs (1152 cameras)
- Support Internet Explorer, PTZ controlling, and playback
- Support PDA monitoring, and playback
- Support Dynamic IP and DNS
- Support two-way audio communication by 1 CH
  - Up to 4 CH sound recording

### Specifications

|                        |   |         |
|------------------------|---|---------|
| <b>MODEL NUMBER</b>    | <b>MP4S-08120</b>   |         |
| Channel                | 8CH   |         |
| Board Requirement Q'TY | 1PCS  |         |
| Split Screen           | Full Screen, 4, 6, 9 and auto switch  |         |
| Camera Signal          | NTSC / PAL  |         |
| Compression            | MPEG4   |         |
| Resolution             | NTSC:352 X 240, 704 X 240, 704 X 480 PAL:352 X 288, 704 X288, 704 X 576                                   |         |
| Display Speed          | NTSC  | 120 fps |
|                        | PAL   | 100 fps |
| Recording Speed        | NTSC  | 120 fps |
|                        | PAL   | 100 fps |
| Video Output           | 1* PC Monitor: XGA Display and NTSC / PAL Video Monitor   |         |
| Monitor Output         | 1 sets TV-OUT (Selectable Seq. or Multi)  |         |
| Multiplex Function     | Monitoring, Recording, Searching, Playback and Remote Transmit simultaneously                             |         |
| Sensor I/O             | 8 sets input (NO,NC)  |         |
| Switch Control         | 4 sets (Relay)  |         |
| Display Adjustment     | Brightness/Contrast/Saturation/Color/Tint   |         |
| Motion Detection       | Sensitivity and detection zone adjustable by each camera  |         |
| Backup Function        | Manual or programmed automatic backup schedule supporting HDD, DVD-RW, CD-RW, NAS, RAID and remote backup |         |
| PTZ Function           | Supported   |         |
| Self Restoration       | Auto rebooting by adopting " Watchdog "   |         |
| Networking             | LAN, WAN  |         |
| Remote Control         | Remote control side up to 36 DVRs , support web-page,1 CH audio transmission                              |         |
| Access Safety          | Support 100 users protected by password   |         |
| Playback Image         | Adjustable image size, contrast, brightness and color   |         |
| File Backup            | Chosen video file stored as JPEG file or AVI for display in the supported media                           |         |
| Audio Recording        | 4CH   |         |