


MJPEG 15" 4CH LCD DVR MODEL



FEATURES

- ▶ 15" A grade panel
- ▶ Modified MJPEG Algorithm compression
- ▶ 4 channel DVR 120(100)fps recording capability
- ▶ Triplex (Playback / Recording / Network)
- ▶ Multi Languages OSD
- ▶ IR Remote Controller
- ▶ USB (Device) port for firmware upgrade
- ▶ USB2.0 (Host) for back up
- ▶ Remote viewer via network
- ▶ Supports DDNS (Dynamic Domain Name Server)
- ▶ Operate by front mouse and remote controller

SYSTEM CONFIGURATION

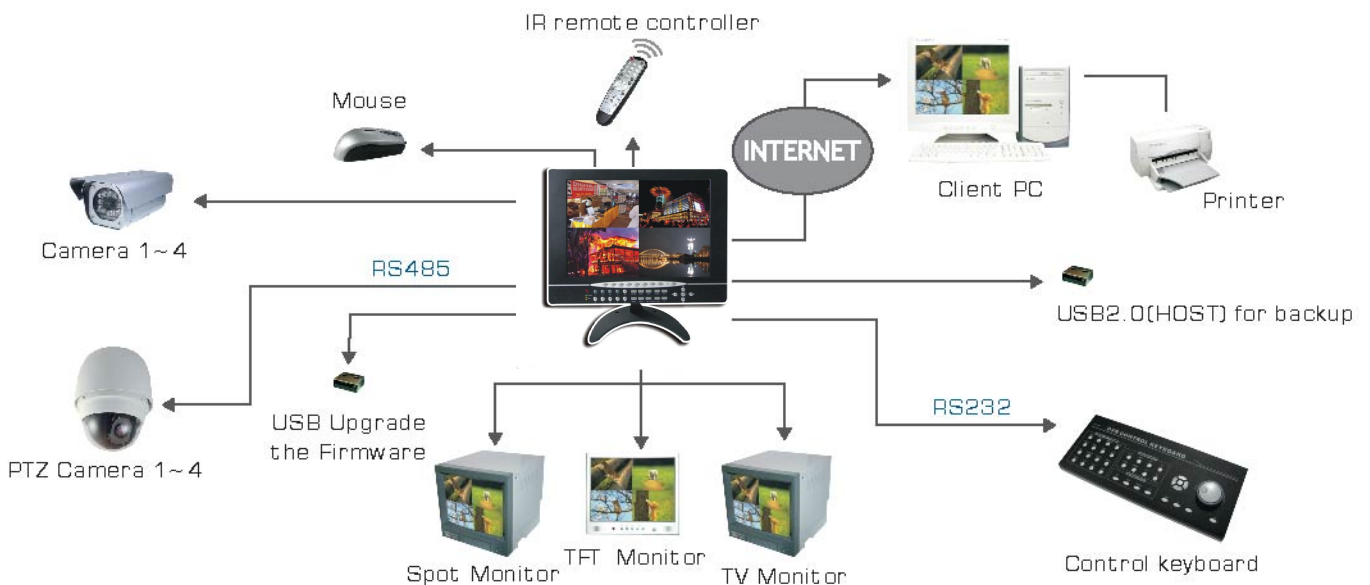

MJPEG 15" 4CH LCD DVR MODEL

SPECIFICATIONS

Model Number		MJ-LD4120-15
Compression		Modified MJPEG Algorithm
Storage Capacity		1 HDD
Video Input		4CH
Video Output		Monitor / Spot Monitor
Split Screen		Full screen, Quad display
Compressed Rate		Low, Mid, High, Super, Hyper
Recording Speed	NTSC	120fps maximum (real time for each channel)
	PAL	100fps maximum (real time for each channel)
Recording Resolution	FULL	704 x 240(NTSC), 704 x 288(PAL)
	CIF	352 x 240(CIF), 352 x 288(PAL)
Display		Real time for each channel
Simplex/Duplex/Triplex		Triplex (Playback / Recording / Ethernet)
Zoom		Available
PIP		Available
Recording Mode		Continuous, Motion
Search Mode		Percentage Search, Date/ Time Search, Event Search
Password Protection		Yes
Backup		USB2.0(HOST), Download via IP Network back-up
IR Remote Controller		Built-in
Control Device		Mouse, Remote Controller, RS232
Alarm Input		4 Alarm (NO/NC)
Relay Output		1 (NO/NC)
Network (TCP/IP)		Remote live view, playback, and save as AVI
Firmware upgrade		USB port for firmware upgrade
Operation Temperature		41°F~104°F (5°C~40°C)
Operation Humidity		Less than 90%
LCD Panel		15" XGA Color TFT-LCD
LCD Display Resolution		1024*768
LCD Color Resolution		16.2M Colors
LCD Pixel Pitch		0.297(per one triad)*0.297
LCD Brightness		250 cd/m ²
Dimension(mm)		395(W) x 230(D) x 391(H)
Weight(N.W)		Approx 6 kgs (W/O HDD)
Power Supply		DC Adapter(12V DC 5A above)