

JPEG2000 16CH BANK DVR

STAND ALONE

Long time recording




The best application :
Bank, Airport, Post office,
Government office, Military,
Hospital, Jewelry store, Head
Quarter, Power station, Gas
Station, Super Market, Police
station and much more...

Supports 10 HDDs
Max. 1000Gb x 10 (10TB)

4 FEATURES

- 4 JPEG2000 Algorithm compression
- 4 Supports 10 HDDs, up to 10,000 GB (10TB)
- 4 Live display and 480(400)fps recording speed ability
- 4 4 channel audio recoding
- 4 Triplex (Playback / Recording / Network)
- 4 Multi Language OSD
- 4 IR Remote Controller
- 4 Jog-shuttle for convenience search
- 4 USB(Device) port for firmware upgrade
- 4 USB2.0(Host) / DVD-RW for back up
- 4 Easy PTZ camera control by front panel buttons
- 4 Remote viewer via network
- 4 Scalable video size via Network transmission
- 4 Supports DDNS (Dynamic Domain Name Server)
- 4 Supports Central monitoring system (CMS)
- 4 VGA output (for LCD Monitor)

4 SYSTEM CONFIGURATION

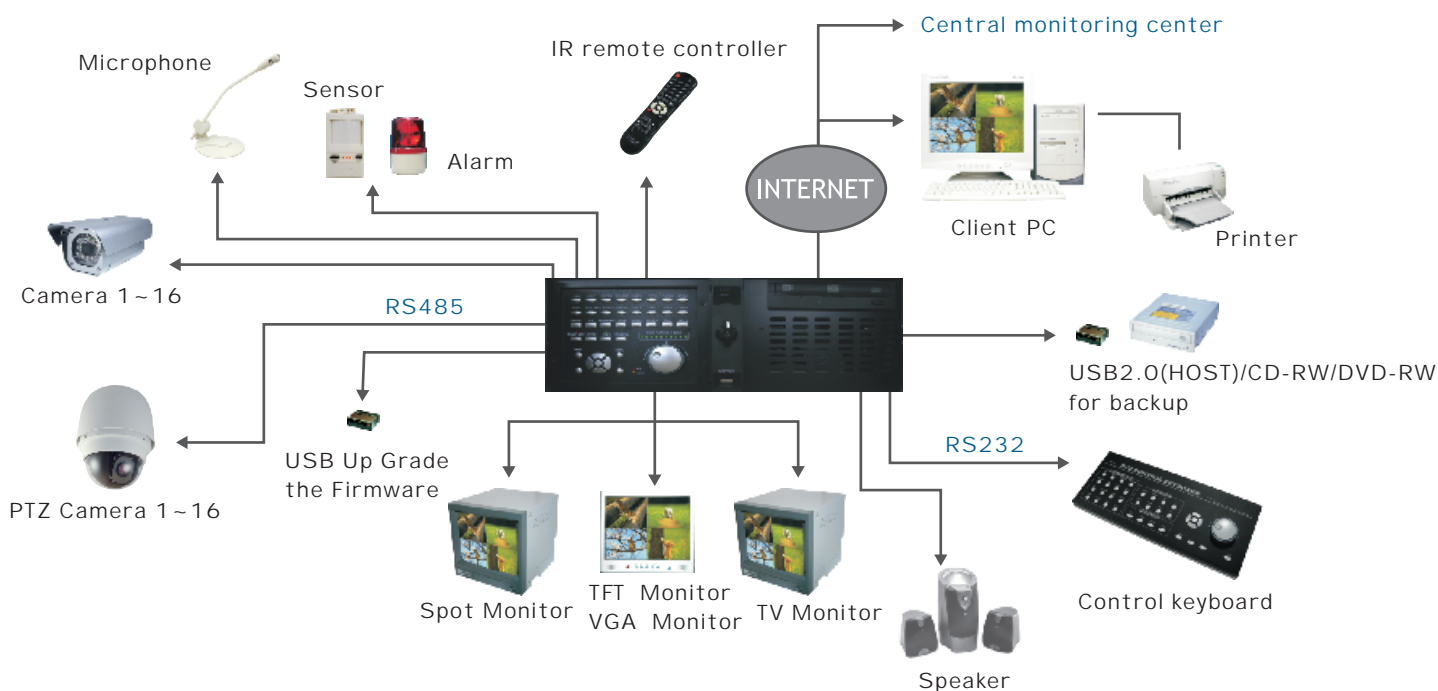

4 SPECIFICATIONS

Model Number		16CH Bank DVR
Compression	JPEG2000 Algorithm	
Storage Capacity	10HDDs	
VGA Output	1CH (Supporting TFT LCD Monitor)	
Video Input	16CH	
Video Output	Monitor / Spot Monitor	
Audio	4CH audio input , 1CH audio output	
Split Screen	1,4,6,8,9,13,16 split	
Compressed Rate	Low, Mid, High, Super, Hyper	
Recording Speed	NTSC	120fps(Full), 240fps(Dual), 480fps(Quad)
	PAL	100fps(Full), 200fps(Dual), 400fps(Quad)
Recording Resolution	Full (720x240 / 720x288), Dual(360x240/ 360x288), Quad(360x120 / 360x144)	
Display	Real time for all channel	
Simplex/Duplex/Triplex	Triplex (Playback / Recording / Ethernet)	
Zoom	Available	
PIP	Available	
Motion Detect	Area division : 16x12	
Recording Mode	Time, Motion, Schedule, Alarm, Emergency	
Search Mode	Percentage Search, Date/ Time Search, Event Search	
Password Protection	Admin, Manager, User1~8 Allowed to access the system	
Alarm Input	16 Alarm (NO/NC)	
Relay Output	1 (NO/NC)	
Backup	USB2.0(HOST), DVD-RW, Download via IP Network, VCR back-up	
IR Remote Controller	Built-in	
Network (TCP/IP)	Remote Software(Remote live view, playback, and save as AVI), IE(Remote live view, backup, and save backup to AVI), Two users access is available, Transmission speed adjustable	
CMS	Available	
Firmware upgrade	USB port for firmware upgrade	
Operation Temperature	41°F ~ 104°F (5°C ~ 40°C)	
Operation Humidity	Less than 90%	
Dimension(mm)	440(W) x 535(D) x 175(H)	
Weight(N.W)	Approx 15kgs (W/O HDD)	
Power Supply	400W	