

CONCEALED CAMERA

A2 Series



This concealed camera is specially designed for ATM machine. There is a camera embedded with the mirror type from cover. It can be used as look back mirror while people using the ATM machine. However, the camera will work without notice.

► FEATURES



- .Camera lens behind by the special front cover
- .Easy adjustable view angle
- .Rugged and Vandal-proof
- .Small size of dimension
- .1/3" Sony color CCD sensor for clear video output
- .BLC function switch ON /OFF



ATM Machine

► SPECIFICATIONS

Model Number		CC-MS-A2
Scanning System	NTSC	525 lines 2:1 interlace
	PAL	625 lines 2:1 interlace
Scanning Frequency	NTSC	15,734Hz(H) , 60Hz(V)
	PAL	15,625Hz(H) , 50Hz(V)
Effective Pixels	NTSC	510(H) x 492(V)
	PAL	500(H) x 582(V)
Electronic Shutter	NTSC	1/60-100,000sec.
	PAL	1/50-100,000sec
Image Device	1/3" SONY Super HAD CCD	
Horizontal Resolution	420 TV lines	
Sensitivity	0.2Lux	
Signal to Noise	More than 48dB	
Gain Control	Auto	
White Balance	Auto ATW 2500-9500 ° K	
Sense-UP times	N/A	
DNR	N/A	
BLC	Switch on / off	
Gamma Correction	0.45	
SYNC System	Internal	
Lens	3.6mm	
Video Output	1.0 Vp-p, 75 Ohm	
Protection Class	N/A	
Power Requirement (± 10%)	DC12V	
Power Consumption (± 10%)	80mA	
Operation Temp.	Operating: -10 ~ + 55 °C , Storage: -30 ~ + 70 °C , Humidity:0~95%RH	
Dimensions (mm)	58(R) x 48(H)	
Weight (N.W)	Approx. 180g	

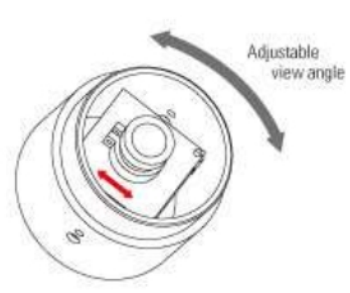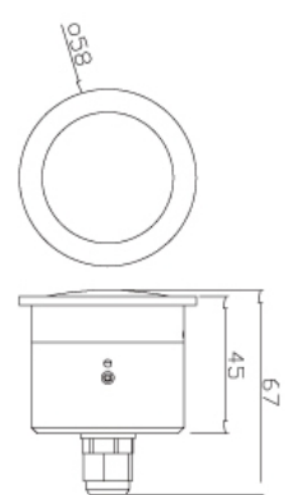

Design and specifications are subject to change without notice.